
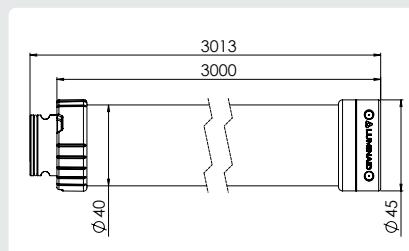
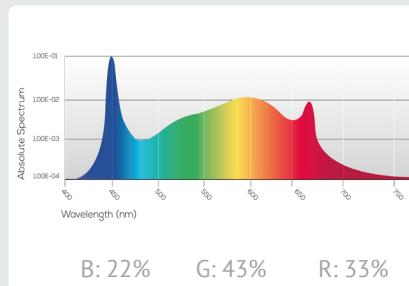


FLORALUX.spectris

3 METER FIXTURE

- Optimized for strawberry cultivation.
- From continued cultivation to an additional winter cultivation.
- Spectris approaches the sunlight to achieve optimal plant development for both stretching and fruit development.
- Standard dimmable.
- Dust-proof, splash-proof and impact-resistant.
- High PPFD values for optimal growth stimulation.
- The lowest installed power per hectare.
- Limited radiant heat: only 2.5 °C increase on the foliage.
- Connectable light fixtures.
- Simple and quick assembly

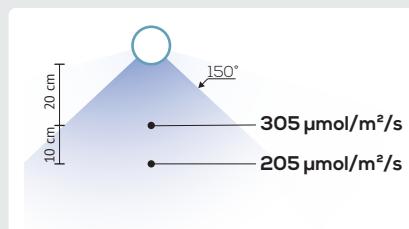

Connectable fixtures with integrated driver

Power

150 Watt

part nr.:
LUM-FL30HP-12FS-D150

Maximum line lenght 16 st. / 48 m

Features

Dimming

Standard 0 - 10 V

-20 °C ~ +40 °C

32 mm

Ambient temperature range

Maximum shadow width

Mechanical

Fixture dimensions

Ø40 mm x 3013 mm (3000 mm pitch)

Weight

3,0 kg - 3,5 kg

IP-class

IP65

Housing material

Polycarbonate (UV stabilized)

Electrical

System input voltage

230 VAC

Fixture power

150 W

Beam profile FLORALUX.spectris - 150°

