


CONNECTS: PLUGLINK FOOD GRADE

FLEXIBLE INTERCONNECTION

- The PLUGLINK FOOD GRADE is a cable with DATALUX connectors on both sides. This is intended to place a flexible part in the light line. This can be useful, for example, if a part of the building construction obstructs the linear assembly, if you want to make a bend in the light line or if the ceiling height changes.
- This Connect module can be used in combination with the LT light line and the AC light line.
- The PVC has been specially developed for applications in the food processing industry according to the requirements of FDA CFR 21 and NSF 51.

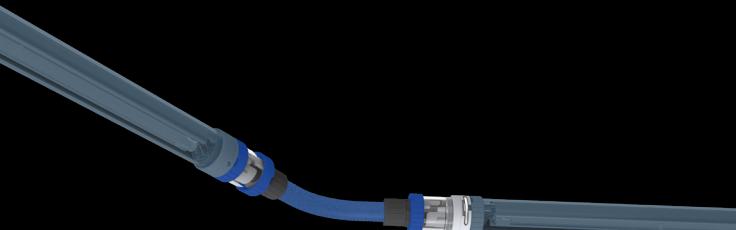

Features

Passed signals

AC, DC, Emergency lighting, Dimming

$\varnothing 45 \times \varnothing 40 \times \varnothing 21$ mm

IP65

IK10

Corrugated tube: PVC

Connector: PC, PA

-35°C ~ +50°C (till +70°C)

Dimensions

IP class

IK class

Material

Temperature range

30 CM

article nr.: LUM-DL01LT-LINK-FG03

Dimensions A / B

300 mm / 112 mm

100 CM

article nr.: LUM-DL11LT-LINK-FG10

Dimensions A / B

1000 mm / 812 mm

200 CM

article nr.: LUM-DL21LT-LINK-FG20

Dimensions A / B


2000 mm / 1812 mm

300 CM

article nr.: LUM-DL31LT-LINK-FG30

Dimensions A / B

3000 mm / 2812 mm

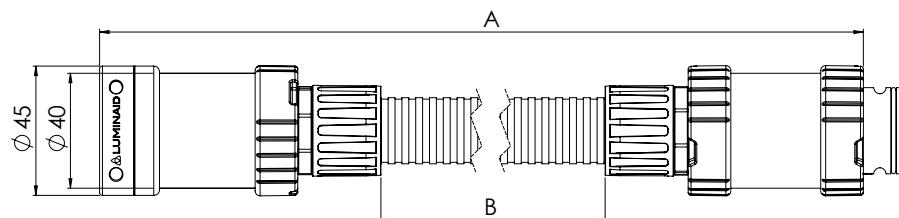

All products, product specifications and data are subject to change without notice to improve reliability, safety, function, design or otherwise.